

PH IT 01 000 1 WO PCT	M... DOSSIER
-----------------------------	-----------------

ST AVAILABLE COPY IDS




WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 5/57</b>		A2	(11) International Publication Number: <b>WO 99/20042</b>
			(43) International Publication Date: 22 April 1999 (22.04.99)
(21) International Application Number: PCT/IB98/01390 (22) International Filing Date: 8 September 1998 (08.09.98) (30) Priority Data: 97203168.6 13 October 1997 (13.10.97) EP (71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: HOUTSLAG, Antonius, Hendricus, Maria; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). LAMMERS, Matheus, Johannes, Gerardus; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: DE HAAS, Laurens, J.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		(81) Designated States: JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published Without international search report and to be republished upon receipt of that report.	

*Enhance brightness  
in a window  
(CRT)*

(54) Title: IMAGE DISPLAY DEVICE

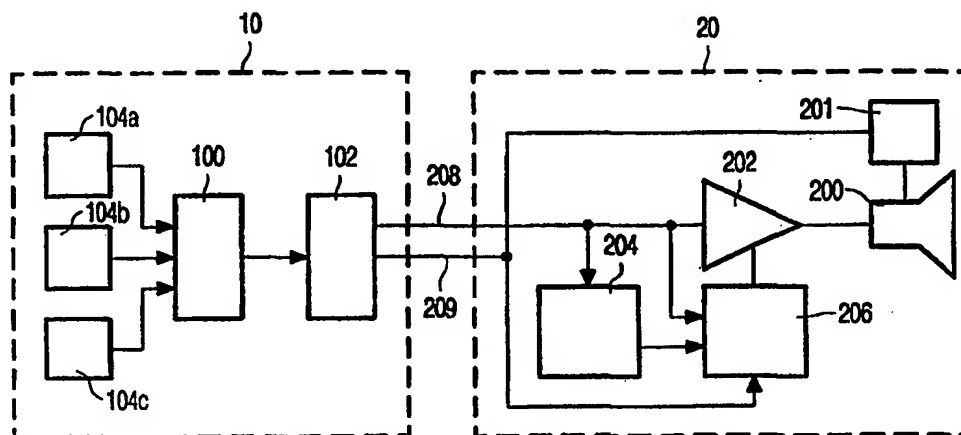

(57) Abstract

The drive signal range of a CRT is locally enhanced in a window. The average luminosity in the window is monitored and the drive signal range is reduced if there is a danger of doming in the window.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Image display device.

The invention relates to an image display device according to the precharacterizing part of Claim 1. Such a device is known from PCT patent application No. WO 96/17338.

This device makes it possible to show an image which contains video and  
5 text and to enhance the luminosity range of the image in windows which contain video  
beyond the luminosity range of areas outside the window which contain text. The increase in  
the luminosity range makes the video richer in contrast, but on a CRT it also increases the  
spot-size, which would be undesirable for text areas. By increasing the range of luminosity  
only locally where a window with video is shown, video with a richer contrast can be  
10 combined with text.

However, it has been found that by extending the luminosity range one  
increases the risk of doming (deformation of the shadow mask due to heating by the electron  
beam) and overloading of the high voltage (EHT) power supply.

15 Amongst others it is an object of the invention to combine the display of  
high luminosity video, photographs or graphics with high resolution text on a CRT, without  
problems due to EHT overloading. A further object is to avoid problems due to doming in  
such a device.

20

The device according to the invention is characterized by the  
characterizing part of Claim 1. By locally reducing the range of drive signal values in the  
windows where it has been enhanced in case the luminosity (i.e. beam energy) range  
25 becomes too high, overloading problems can be prevented.

A further embodiment of the device according to the invention is  
described in claim 2. By measuring the average luminosity in the window, or in each one of  
a number of separate windows where the drive signal range is increased, and reducing the  
drive signal range selectively if the average luminosity is too high, local doming effects are

prevented. At the same time, text windows retain their original drive signal range and therefore they retain the same level of readability.

In an embodiment of the device according to the invention the drive signal range is adjusted by varying an amplification gain of an amplification circuit for the image signal (e.g. for each of the R, G and B components). This can be readily implemented by inserting an amplifier with adjustable gain in the video signal path of known monitors, or using gain control inputs of available video amplifier IC's. In another embodiment, the window or several windows are identified by coordinates of corner points of the window(s) and/or values of the width and height of the window. Thus the further information can be received with very little bandwidth using existing bus protocols e.g. between monitors and PC's.

In a further embodiment of the device according to the invention the average luminosity in a window is averaged over time and the average over time is used to control the drive signal range for the window. By averaging the average luminosity over time sudden artificial changes in visible luminosity due to the invention are prevented. Doming effects occur only with a long time constant of typically several minutes. Short excesses in the luminosity can be tolerated without visible effect. As a result the time range over which the average is taken may be typically one minute or more. This also means that the circuit which selects the drive signal range may be relatively slow.

In another embodiment of the device according to the invention, the window is selected on the basis of a spatial frequency content of the image in the window. This makes it possible to discriminate between text and video, photo or graphics information.

These and other advantageous aspects of the invention will be described using the attached figures.

Figure 1 shows an image display system according to the invention

Figure 2 shows an image containing several windows

Figure 3 shows an amplification gain of an amplifier

30

Figure 1 shows an image display system. The system contains a processing apparatus 10 (which is for example a PC) and a monitor 20. The processing

apparatus 10 contains several image sources 104a-c connected to a device driver 100.

Although the image sources 104a-c and the device driver 100 are shown as individual units, they may actually be implemented as programs stored in the processing apparatus 10 and executed by a processing unit (not shown) of the processing apparatus 10. The device driver  
5 100 has an output connected to a video card 102. The video card 102 is connected to an RGB output and a sync output of the processing apparatus 10.

The monitor 20 has an RGB input 208 and a sync input 209. The monitor 20 contains a video amplification circuit 202 which is coupled to the RGB input 208. An output of the video amplification circuit 202 is coupled to a CRT (Cathode Ray Tube) 200.

10 The monitor contains a deflection control circuit 201 having an input coupled to the sync input 209 and an output coupled to the CRT 200.

The monitor 20 also contains a processing element 204 and a gain control unit 206. The RGB input 208 is coupled to the processing element 204 and the gain control unit 206, which is also connected to the sync input 209. An output of the processing element  
15 204 is coupled to the gain control unit 206 and an output of the gain control unit 206 is connected to a gain control input of the amplification circuit 202. Of course, instead of RGB representation of the image other representations of the image may be used, like YUV representation, but for the sake of clarity the invention will be explained using RGB signals.

In operation the image display system will cause the display of an image  
20 on the CRT 200.

Figure 2 shows an example of a displayed image 20. The image contains two rectangular windows 22, 24. Different window sources 104a-c may produce image information that defines the image inside respective windows 22, 24, but it is also possible that an image source 104a-c define the image inside more than one window, or in one or  
25 more subwindows contained in a window.

The image sources 104a-c supply the image information to the device driver 100, which converts the image information into a form that is adapted to control the video card 102. The video card 102 processes the information to form an RGB signal and horizontal and vertical sync signals to control the operation of the CRT 200. The RGB  
30 signals are supplied to the amplification circuit 202, which amplifies each of the R (Red), G (Green) and B (Blue) signals and supplies the amplified signals to the CRT 200. The deflection control circuit 201 processes the sync signals and supplies deflection signals to the CRT top ensure that the RGB information is written at the right location on the screen of the CRT 200.

In some of the windows 22, 24 the image is shown on the CRT 200 with a greater luminosity range than in other windows. This is used for example for windows in which video information or (photo)graphic information is displayed. On the other hand in other windows, for example windows where letters are displayed, the luminosity range is not extended. Increasing the luminosity range so that a higher luminosity can be produced increases the CRT beam spot size, so that the maximum possible resolution is decreased. By increasing the luminosity range in certain windows and not in others, the other windows (e.g. text windows) retain high resolution but at the same time the perceptual quality of video/(photo)graphic information is improved by the greater luminosity range.

10 The video card 102 sends a signal which identifies the windows in which the luminosity range should be greater, for example in the form of coordinates (x0,y0) of the lower left corner, and width and height values (xw,yw) of the window. This signal is sent for example in an otherwise unused video line, or using a separate bus, using for example one of the known MVL (Moving Video Labs), USB or DDC2B+ protocols. The processing element 15 204 in the monitor 20 receives this signal, decodes it and sends information to the gain control unit 206 to identify these windows, for example in the form of coordinates (x0,y0) of the lower left corner, and width and height values (xw,yw) of the window.

The gain control unit 206 processes the sync signals and determines when RGB values concerning pixels inside identified windows are transmitted. When this is the case, the gain control unit 206 supplies a signal to the amplification circuit 202 to increase the amplification gain.

Figure 3 illustrates the increased gain for two raster lines 26, 28 shown in figure 2. A first trace 30 shows an amplification gain along a first raster line 26 which crosses a first window 24 for which information is transmitted indicating that it should have higher gain. Outside the windows the gain has a lower value. Similarly, a second trace 32 shows an amplification gain along a second line, which crosses two such windows 22, 26.

Preferably a monitor 20 is used that is capable of displaying an image in which each pixel has maximum luminosity in case the amplification gain is not increased anywhere. In such a monitor 20, the high voltage (EHT) does not drop below a minimum acceptable level in this case and no unacceptable doming effect will occur due to heating of the CRT 200.

With such a monitor, the increased amplification gain in some windows may cause EHT or doming problems because too much power is used in the CRT. Often, the increased amplification gain will not lead to any problems with the EHT or doming because

the average luminosity level inside a window is usually much less than the maximum possible luminosity value. For example, in a video/photographic window, the average luminosity is typically one third of the maximum possible luminosity. So if the amplification gain is increased by a factor three or less no problems will occur on average.

5                   However, without further measures, these problems are avoided only on average. When the image has a near maximum luminosity over most of a window in which the amplification gain is increased local doming may still occur and the EHT supply may fall too low.

                  To prevent such problems, the gain control unit 206 preferably computes  
10   for each window in which the amplification gain is increased a respective sum of the luminosity values defined by the RGB values. Such a sum is indicative of the per pixel average luminosity in the corresponding window and if the sum is too high problems may be expected if the amplification is applied to that window. To prevent such problems, the gain control unit 206 compares the average for each window with a threshold value and if the  
15   average exceeds the threshold the gain control unit 206 reduces the amplification gain for the corresponding window, so that the average luminosity in the window on the screen of the CRT does not cause doming problems. To illustrate this, in the first trace 30 the second window 24 is seen to have a lower increased gain than the first window 22, because the average luminosity in the second window 24 has a higher average luminosity.

20                   For example, suppose the monitor 20 is capable of handling an average luminosity LM without problems. (LM is typically the luminosity which occurs when maximum RGB values are used without increased amplification gain). If the average luminosity of the RGB values in a window is A and the increased amplification gain is G then  $G \cdot A$  should be less than LM and if A is greater than  $LM/G$ , then the gain control unit  
25   206 will reduce G to  $LM/A$  at the highest.

                  The size of doming effects depends on the location on the screen. For example, for most CRT's doming effects are smaller close to the edges of the screen. Therefore, one may select the maximum luminosity LM as a function of the position of the window, or the positions covered by the window, dependent on the size of the acceptable  
30   doming effect for that position or those positions.

                  If the contents of the window change as a function of time, the average A is preferably computed as a temporal average averaged over a certain amount of time, typically one or more minutes, for typical CRT's 200 in which doming effects occur in a time-scale of one or more minutes. This avoids visible sudden changes in gain and prevents

unnecessary changes if the average luminosity in the window is temporarily too high. Temporary excess luminosity is no problem because it takes a certain amount of time before a high luminosity leads to doming problems.

Thus, the areas of the image where the gain is not increased (e.g. areas with text containing letters) retain the same luminosity and remain readable, but an enhanced windows is made less luminous in its entirety, i.e. without artificial local gain variations inside that window.

The temporal average may be determined for example by averaging the average computed for one window in one video frame over one or more minutes or by low-pass filtering the average computed for one window in one video frame with a filter that has a bandwidth of one inverse minute or less.

Of course, the gain control unit 206 may implement the prevention of doming in one of several ways. For example, instead of adjusting the amplification gain continuously or in small steps, the gain control unit may simply switch-back the amplification gain for a window to the normal amplification gain in one step if the average luminosity is too high. This results in a very simple digital control.

For the prevention of problems with the high voltage supply (EHT) it is not necessary to average the luminosity of the windows separately. Instead one may average the luminosity of the entire image with increased gain in individual windows, too determine whether the average luminosity in the image is too high. If so the gain can be reduced for individual windows in which the gain was increased. To prevent EHT problems time-averaging of the average luminosity is performed in time-scale that is typical for the response time of the EHT supply, typically in the order of seconds.

The gain control unit 206 may combine two control mechanisms, one for preventing problems with the EHT supply which controls the average luminosity over the entire image and one for preventing problems with doming which controls the averages for individual windows.

The windows in which the amplification gain is increased can be selected at will. In one version, this is done by the image sources 104a-c, for example by application software in a PC. One such image source 104a-c is for example a WEB browser which shows a WEB page containing text and subwindows with photos or video. In this case, the browser may indicate one or more of the subwindows with photos or video in order to increase the amplification gain.

Alternatively, the device driver 100 may select windows in which the gain



must be increased. This can be done for example by determining the high spatial frequency energy-content in a window that would be lost by increasing the gain due to increased spot size in the CRT and comparing it with the low spatial frequency energy-content (excepting zero-spatial frequency).

5                   Only if the high frequency content is sufficiently small relative to the low frequency content, the image may be taken to be a photo, video or graphics instead of text and the increased amplification may be switched on. Preferably, the device driver switches on increased amplification only for windows that are larger than a certain size. This reduces the number of windows for which averages must be computed and prevents increased gain  
10 for secondary information such as logo's.

In this way, image sources 104a-c can be used that are independent of the possibility to increase the gain in selected windows.

The shape of the windows is not necessarily rectangular. However, for rectangular windows the position and size of the windows can be easily communicated in the  
15 form of coordinate values of corners and/or height width values. For most other window shapes more parameters need to be communicated, or a signal can be supplied for each pixel to identify the window to which the pixel belongs.

Preferably, gain control is implemented in the monitor 20, as shown. However, it is also possible to implement it in the processing apparatus 10, e.g. in the device  
20 driver 100 for example using a software computer program. In this case, a conventional monitor 20 is preferably augmented with a switch, to increase the gain of the RGB amplifiers. This switch is operable by the processing apparatus, for example using the MVL protocol.

In this version the processing apparatus 10 for example under control of  
25 the program decides whether increased gain is needed and if so the processing apparatus causes RGB amplifiers in the monitor 20 to switch to high gain for the entire image. Under control of the program the processing apparatus then correspondingly reduces the RGB output strength supplied to the input of the RGB amplifiers everywhere except for the windows where higher gain is desired. When the average luminosity in such a window is too  
30 high, the RGB output is reduced for such a window too.

Thus the same effect can be achieved as with the gain control unit 206, except that at least one bit of RGB quantization resolution is lost.

## CLAIMS:

1. An image display device comprising
  - an input for receiving information representing an image;
  - drive means for generating a drive signal from the information;
  - a cathode ray tube for displaying the image driven by the drive signal;
- 5 - input means coupled to the drive means for receiving further information identifying a window of pixels in the image, the drive means being arranged to change a relation between the information and the drive signal in the window as compared to a further relation between the information and the drive signal in area outside the window, so as to extend a drive signal range in the window beyond a normal drive signal range used outside the window;
- 10 characterized in that the drive means are arranged to change back said relation between the information and the drive signal in the window so as to reduce the drive signal range when an average luminosity on the cathode ray tube exceeds a threshold value.
2. An image display device according to Claim 1, wherein the drive means
- 15 determine said average luminosity averaged over said window from the information received for said window, the drive means controlling said relation so that said average luminosity remains below the threshold value.
3. An image display device according to Claim 1, wherein the drive means
- 20 contain an amplification circuit, the drive means changing said relation by adjusting an amplification gain of the amplification circuit.
4. An image display device according to Claim 3, comprising deciding
- 25 means for deciding whether it is required to extend the drive signal range anywhere in the image, the deciding means thereupon increasing said gain for the entire image, and adjusting said information which is used to generate the drive signal outside the window and, when the average luminosity exceeds the threshold value, also inside the window.
5. An image display device according to Claim 1, wherein the further

information comprises coordinate values of the window, the drive means determining the window in which the drive means changes said relation from said coordinates.

6. An image display device according to Claim 2, wherein determining said  
5 average luminosity involves averaging a luminosity the information over time.

7. An image display device according to Claim 1, wherein said window is  
selected by determining a high spatial frequency content of the image in said window, which  
would be suppressed by enhancing the drive signal range due to increase in a spot size of the  
10 cathode ray tube, and selecting said window only if said high spatial frequency content is  
below a threshold.

8. An image display device according to Claim 1, wherein said window is  
selected only if it has more than a predetermined size.

15

9. An image display device comprising  
- an input for receiving information representing an image;  
- an amplification circuit for generating a drive signal from the information;  
- a cathode ray tube for displaying the image driven by the drive signal;  
20 - drive means having an input for receiving further information identifying a window of  
pixels in the image, the drive means being arranged increase an amplification gain of the  
amplification circuit for a part of the image in the window.

10. An image display device comprising  
25 - an input for receiving information representing an image;  
- drive means for generating a drive signal from the information;  
- a cathode ray tube for displaying the image driven by the drive signal;  
- input means coupled to the drive means for receiving coordinates of a window of pixels in  
the image, the drive means being arranged change a relation between the information and the  
30 drive signal in the window as compared with a further relation between the information and  
the drive signal in area outside the window, so as to enhance a drive signal range in the  
window.

1/1

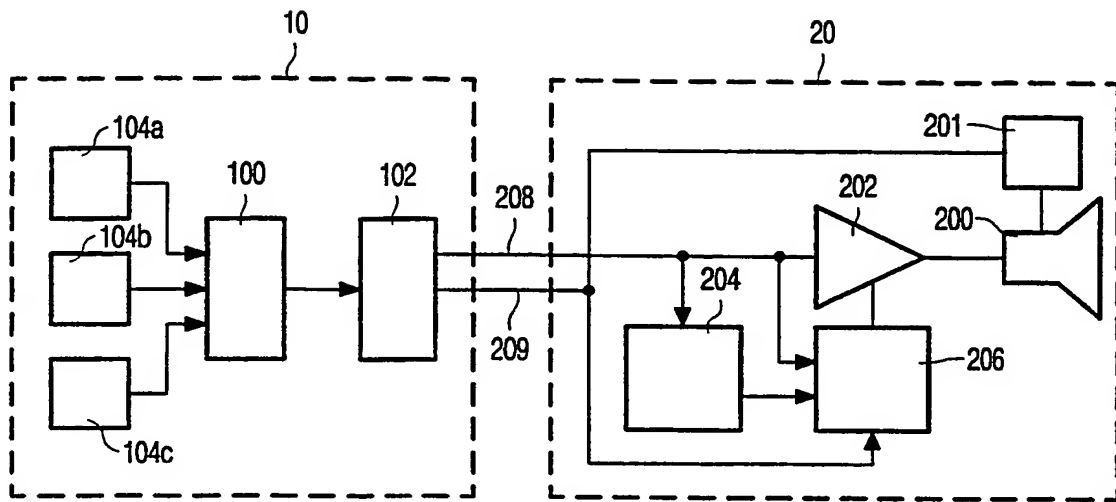


FIG. 1

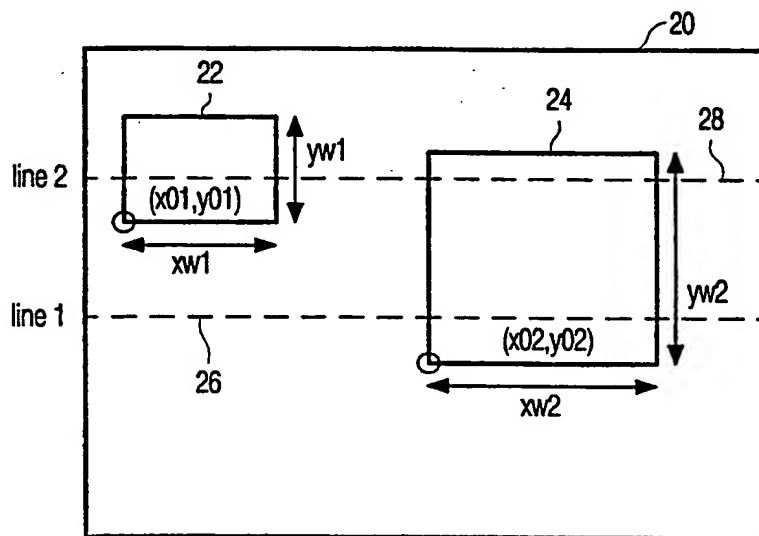


FIG. 2

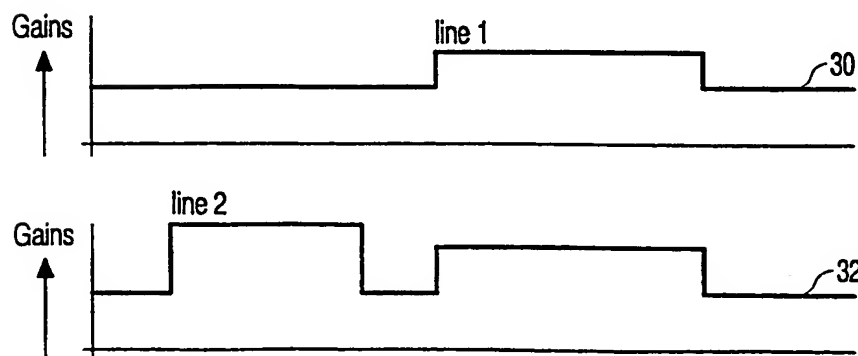



FIG. 3



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>H04N 5/57, G09G 5/14</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 99/20042</b> <b>(43) International Publication Date:</b> 22 April 1999 (22.04.99)
<b>(21) International Application Number:</b> PCT/IB98/01390 <b>(22) International Filing Date:</b> 8 September 1998 (08.09.98)  <b>(30) Priority Data:</b> 97203168.6 13 October 1997 (13.10.97) EP  <b>(71) Applicant:</b> KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).  <b>(71) Applicant (for SE only):</b> PHILIPS AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).  <b>(72) Inventors:</b> HOUTSLAG, Antonius, Hendricus, Maria; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). LAMMERS, Matheus, Johannus, Gerardus; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).  <b>(74) Agent:</b> DE HAAS, Laurens, J.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		<b>(81) Designated States:</b> JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>  <b>(88) Date of publication of the international search report:</b> 24 June 1999 (24.06.99)

(54) Title: IMAGE DISPLAY DEVICE

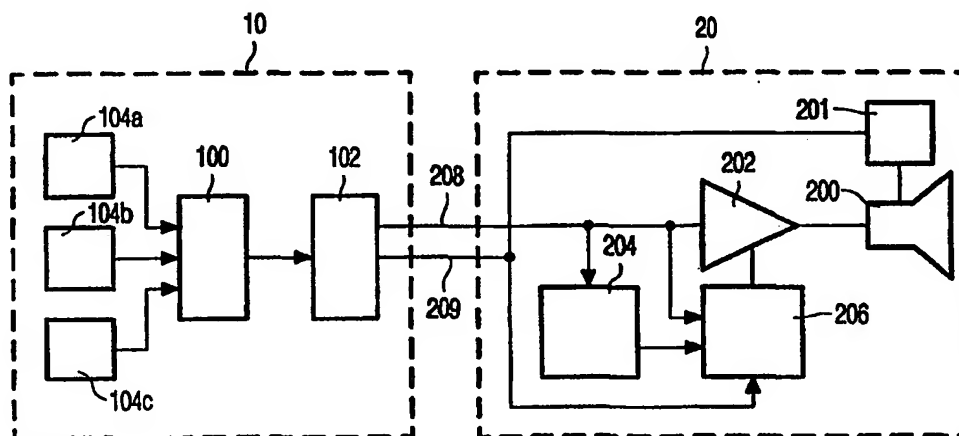

## (57) Abstract

The drive signal range of a CRT is locally enhanced in a window. The average luminosity in the window is monitored and the drive signal range is reduced if there is a danger of doming in the window.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/01390

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04N 5/57, G09G 5/14

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04N, G09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 9617338 A1 (ALLIANCE SEMICONDUCTOR CORPORATION), 6 June 1996 (06.06.96), cited in the application	9,10
A	--	1-8
X	EP 0762753 A2 (MATSUSHITA ELECTRIC INDUSTRIAL CO. LTD.), 12 March 1997 (12.03.97), abstract	9,10
A	--	1-8
A	EP 0601647 A1 (PHILIPS ELECTRONICS N.V.), 15 June 1994 (15.06.94), abstract	1-10
	--	

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 April 1999

Date of mailing of the international search report

23 -04- 1999

Name and mailing address of the ISA:  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Bengt Romedahl  
Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/01390

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5283561 A (LEON LUMELSKY ET AL), 1 February 1994 (01.02.94), abstract  -- -----	1-10

Form PCT/ISA/210 (continuation of second sheet) (July 1992)



**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/03/99

International application No.  
PCT/IB 98/01390

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9617338	A1	06/06/96	US	5638090 A	10/06/97
EP	0762753	A2	12/03/97	CN	1150734 A	28/05/97
				JP	9083894 A	28/03/97
				JP	9102918 A	15/04/97
EP	0601647	A1	15/06/94	CN	1034150 B	26/02/97
				CN	1092923 A	28/09/94
				DE	69309621 D,T	30/10/97
				JP	6303423 A	28/10/94
				SG	44005 A	14/11/97
				US	5448307 A	05/09/95
US	5283561	A	01/02/94	DE	69020753 D,T	14/03/96
				EP	0384419 A,B	29/08/90
				JP	1750556 C	08/04/93
				JP	2250585 A	08/10/90
				JP	4032593 B	29/05/92

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**